

High Resolution Day & Night IR Camera

IR2536H




Key Features

- 1/3" SONY SuperHAD CCD, 520 TVL
- 4.0 mm lens
- 36 nos. of **BLACK DIAMOND 5mm IR LED**, 30 meters
- Anti IR reflect front glass design (Dual Glass)
- IP66 IEC Weather proof standard

Specifications

Brand	TANDER
Model	IR2536H
Image Pick-up Devise	1/3" SONY SuperHAD CCD
Signal System	PAL
Total /Effective Pixels	752(H)x 582(V) 470K
Scanning System	2 : 1 Interlace
Lens	4.0mm
Scanning Frequency	50Hz(VD), 15.625Hz(H), 50Hz(V)
Resolution	520TV lines
Video Output	CVBS : 1.0Vp-p / 75 composite BNC Connector
S / N Ratio	More than 48dB (AGC Off)
IR LED	36 nos. of BLACK DIAMOND 5mm IR LED 30 meters coverage
Min. Illumination	0.1 Lux (F : 1.2) , 0 Lux (IR LED On)
Sync. System	Internal
Signal Process	Digital Signal Processing
Back Light Compensation	Built-in
Gain Control	Auto
Electronic Shutter Speed	Auto / (1/50 ~ 1/100,000)
White Balance	Auto tracking White
Housing	Patented Heat Dissipating Fully Aluminum Housing
Power Source	12V DC \pm 0%
Power Consumption	110 mA (IR LED off) , 400 mA (IR LED on)
Operating Temperature	-10 C ~ 45 C
Operating Humidity	0% ~ 80% RH
Dimension	74mm(O) x 110mm(D)
Weight	800g

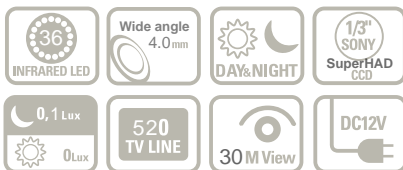

BLACK DIAMOND
IR LED
4X brighter



TANDER[®]